



Tomorrow's marking technology...today!

Model 200 I-Mark Controller

The I-Mark controller is designed for easy **integration**. It features compact size and a **selection of communications functions** including: Serial, I/O, Modbus, and Ethernet IP. The standard controller is programmed with a customer provided PC using the I-Mark software. Using this same software the system may be monitored via a LAN. Upgrade options include an integrated PC, standard or touch screen monitor, and keyboard.



- NEMA 4 industrial enclosure 16" W x 12" H x 8" D (406 x 305 x 203 mm)
- (4) Mounting holes.
- Sixteen (16) 24vdc optically isolated digital I/O fully programmable with software for controlling external hardware devices to help save costs in automated applications. (8 inputs and 8 outputs)
- Binary select feature for selecting & executing up to 32 programs via the I/O
- Ethernet 10/100 BaseT communications for programming

and integration into system network (can be used with static IP setup or in DHCP mode on a network)



- Machine protocols include: serial, I/O, Modbus, and Ethernet IP.
- I-Mark networkable motor drives for stepper or servo motor control with 10a peak motor output per axis. (Up to 4-axis per controller)
- Digital current and servo loops with encoder for controlling servo motors
- Closed or open loop stepper motor control with micro stepping capability.
- Industrial Harting connectors for marking head
- Manual reset / E-stop featured as remote options in the I/O interface



Model 200 I-Mark Controller

Model 200 Controller How-to-Order

To Order: Select only the symbols that represent the marker feature that is needed. Place that symbol in the sequence as shown.		
Model/Feature	Symbol	Example
I-Mark Model 200	IM200	IM200-
Basic integration (std)	-	
Operator Station upgrade		
Basic Screen	OS	
Touchscreen	OT	


The Model IM200 basic integration controller is standard with the IM-ID and IM-IS I Series integration marking systems.

Utilities:

- Electrical components require 110 VAC power, 6 ft (1.8m) electrical cord supplied

Options:

- Basic integration model as shown is designed for seamless interfacing into production machinery
- Operator Interface
 - 17" (430mm) screen with Keyboard
 - Touchscreen with Keyboard backup
- I/O included with all options
- Ethernet for programming
- Communication options
 - Modbus (std)
 - Serial (RS232)
 - Ethernet IP

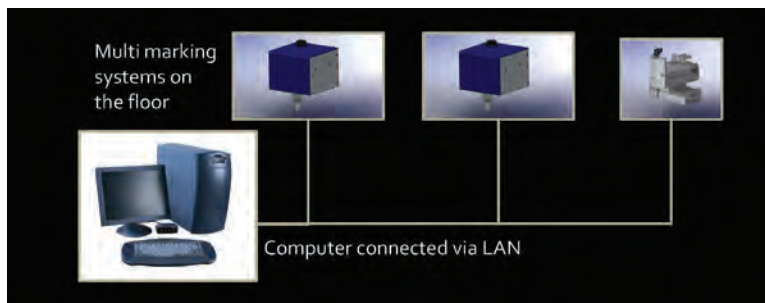

Remote Access:

Model 200 has Ethernet connection to provide remote access for programming of the marking legends and system monitoring including process times and fault information.

Operator Station upgrade:

Model 200 has optional operator station upgrade. This includes a choice of two different monitor styles. This allows the operator more control over the marking systems and includes the flexibility to integrate other systems including camera and verification software into one platform.

