


*CMT LE48 LASER ENCLOSURE*

SHOWN WITH MANUAL Z-AXIS ADJUSTMENT COLUMN. POWERED Z-AXIS OPTIONAL

9.70in [246.4mm]

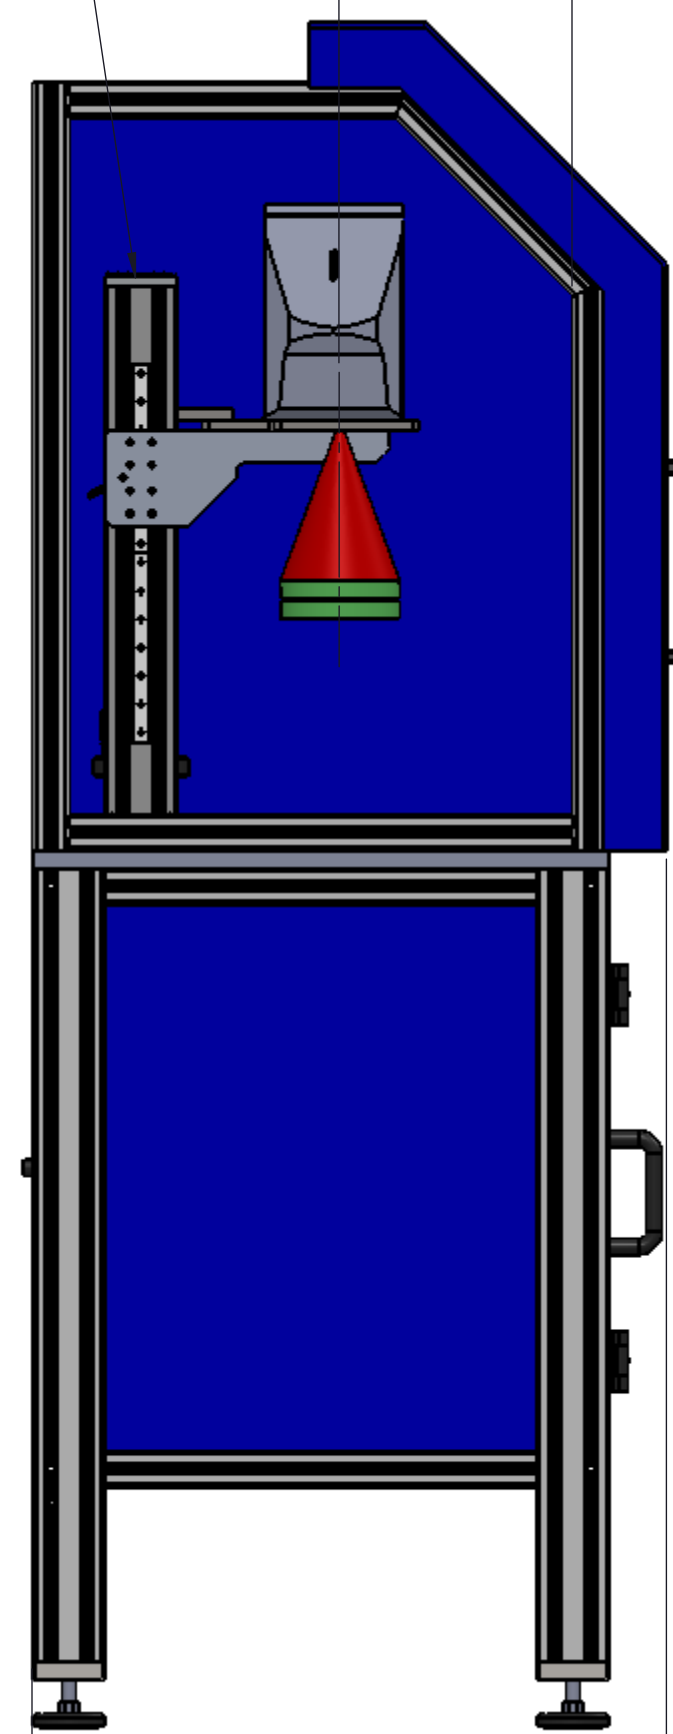

26.44in [671.5mm]

DUAL SAFETY INTERLOCKS AND DOUBLE SEALED LASER CHAMBER DOORS

OPERATION VIEWING WINDOW


12.45in [316.3mm] MAX HEIGHT

36.50in [927.1mm] WORK TABLE HT.

*SHOWN IN DOUBLE DOOR OPERATION*

SHOWN WITH MDX SERIES LASER

INDUSTRIAL SLIDING DOORS WITH DUAL BALLBEARING GUIDE RAILS

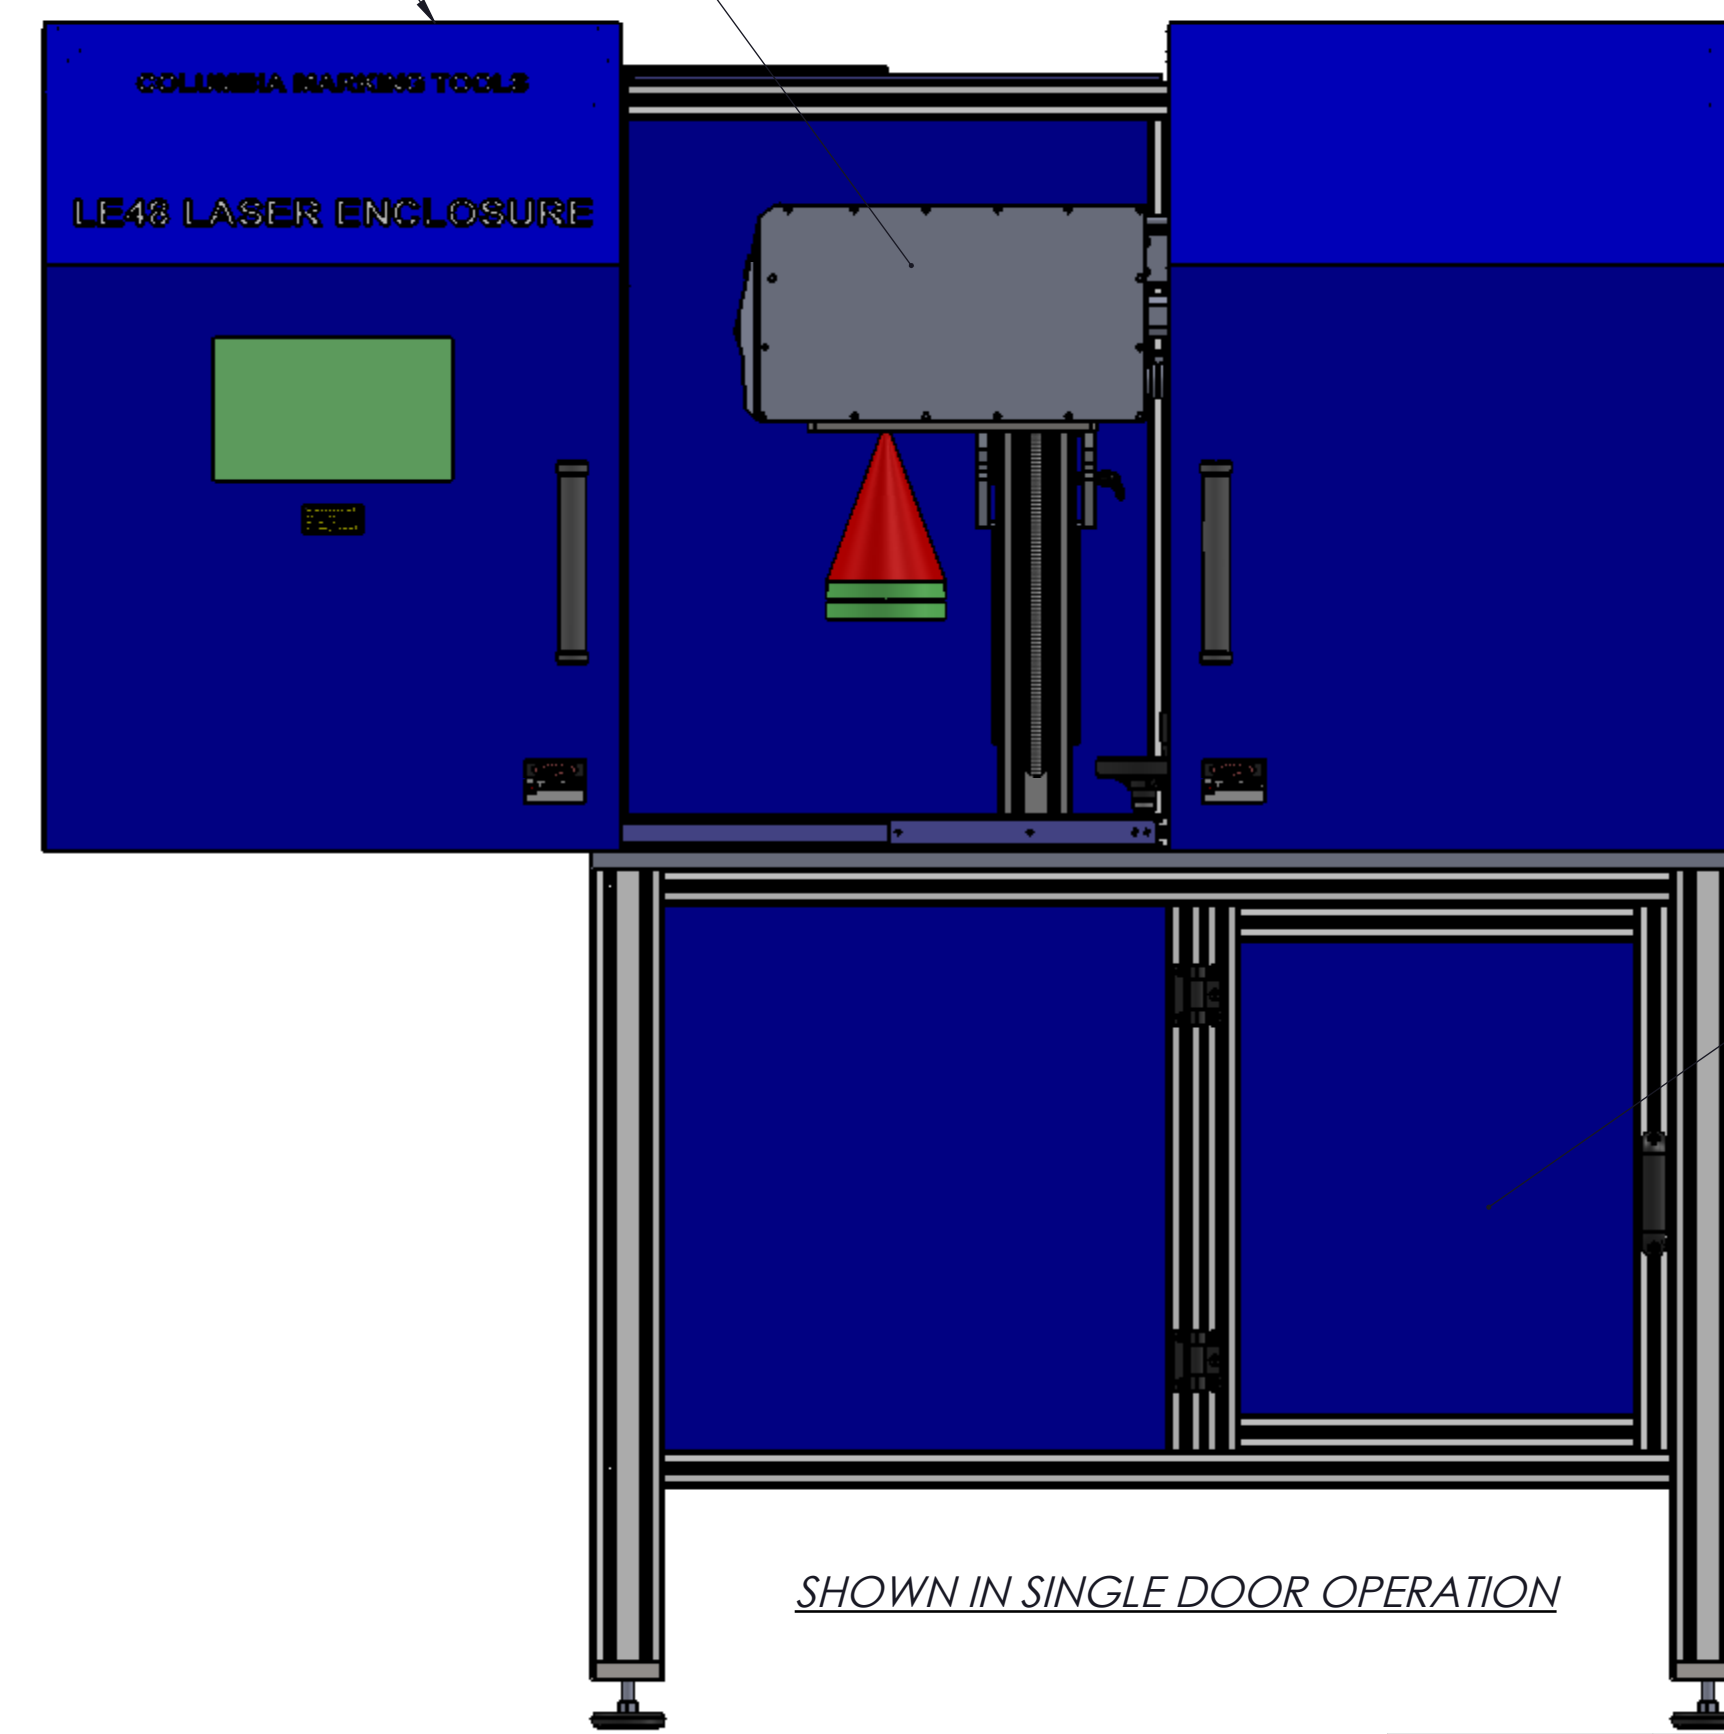

DOOR LATCH FOR SINGLE DOOR OPERATION

CONTROLLER CABINET

*SHOWN IN SINGLE DOOR OPERATION*

ADJUSTABLE MACHINE LEVELING FEET

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN INCHES	AJH	05/28/16
TOLERANCES:	CHECKED	
FRACTIONAL ±	ENG APPR.	
ANGULAR: MACH ± BEND ±	MFG APPR.	
TWO PLACE DECIMAL ±	G.A.	
THREE PLACE DECIMAL ±		
INTERPRET GEOMETRIC TOLERANCING PER:		
MATERIAL		
FINISH		

COLUMBIA MARKING TOOLS 27430 LUCKING DRIVE CHESTERFIELD, MI 48070	
TITLE: LE48 LASER MARKING ENCLOSURE	
SIZE DWG. NO. <b>D</b> LE48-A001m01	REV <b>A</b>
SCALE: 1:8 WEIGHT:	SHEET 1 OF 1

REV  
D LE48-A001m01